



### CSI251 HI-POE VP

- ✓ dome housing for discrete surveillance
- ✓ weatherproof rating IP66
- ✓ vandalproof rating IK10
- ✓ fan-assisted heater HI-PoE/PoE Plus



STL250



STS250



STA250



SA/B



SP/B


#### Dome housing for discrete surveillance

The new system of wiring combined to high quality materials, rugged construction and pleasant design make of the **CSI251HI-POE VP** a product highly qualified for CCTV installation where antivandalism compliant is necessary. This housing HI-PoE/PoE Plus is powered directly by Ethernet cable.

Available there are a wide range of pole, corner adaptors and wall, ceiling, parapet brackets, new entry is a parapet bracket "old style" painted dark grey, model **STA250** indicated for installation in historic cities.

# - DATA SHEET -

## dome housing

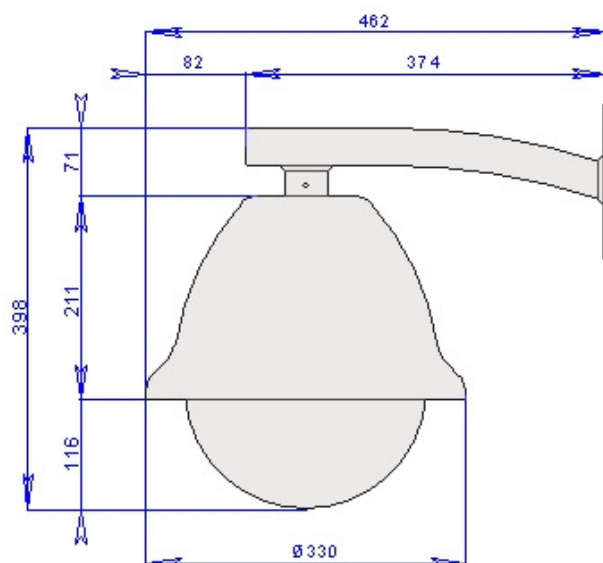

the values are in millimeters

### TECHNICAL DATA

#### GENERAL

- body and sunshield made in aluminium
- painted with polyester powder RAL 7035 (light grey)
- stainless steel bolts and screws
- ring adaptor for AXIS P55xx/Q60xx series
- Ethernet patch-cable for camera connection
- fan assisted heater HI-POE/POE Plus
- supplied with instruction manual
- according to RoHS compliance

#### MECHANICAL


- external dimensions Ø330x398mm. with sunshield and ST250 bracket
- weatherproof rating IP66
- vandal resistant rating IK10
- indoor/outdoor installations
- cable managed
- operating temperature from -20°C to +50°C
- weight 6 Kg. (with ST250 wall bracket)

#### ELECTRICAL

- fan assisted heater 55 Vdc consumption max. 8W  
t on 15°C t off 22°C +/- 3°C

#### RELATED PRODUCTS

- ST250** wall bracket (included on KIT versions)
- STL250** parapet bracket with junction box
- STA250** parapet bracket *old style* with junction box
- SP/B** pole adaptor
- SA/B** corner adaptor

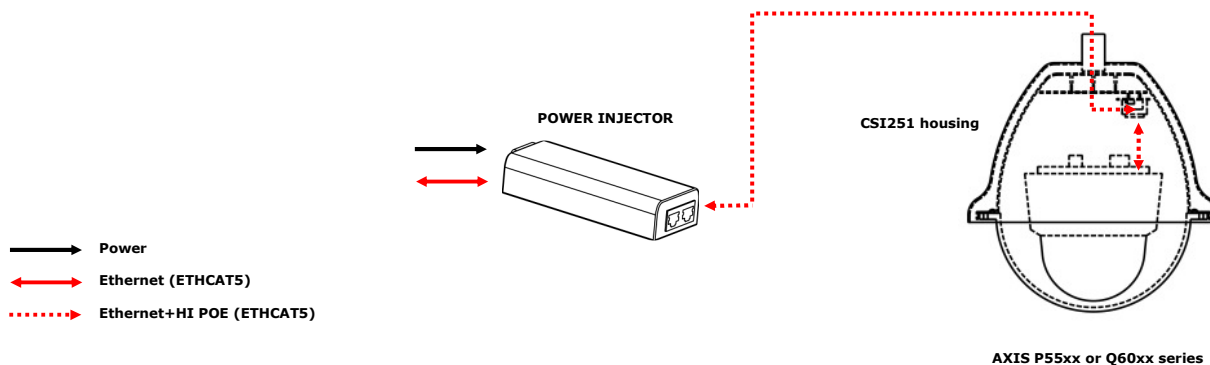

Specifications are subject to change without notice, weights and dimensions are indicative.

**GLOBAL PROOF S.r.l.**

Via dell'Industria, 10 36013 Piovane Rocchette (VICENZA) ITALY  
Phone +39.0445.396190 Fax +39.0445.395000

[info@globalproof.it](mailto:info@globalproof.it)

[www.globalproof.it](http://www.globalproof.it)

CS1251